

## Residential ESS


RESU



## 48V

Models	RESU3.3	RESU6.5	RESU10
Total Energy [kWh]	3.3	6.5	9.8
Usable Energy [kWh]	2.9	5.9	8.8
Capacity [Ah]	63	126	189
Nominal Voltage [V]	51.8	51.8	51.8
Voltage Range [V]	42.0-58.8	42.0-58.8	42.0-58.8
Dimension [W x H x D, mm]	452 x 401 x 120	452 x 654 x 120	452 x 483 x 227
Weight [kg]	31	52	75
Enclosure Protection Rating	IP55		
Communication	CAN 2.0 B		
Certificates	Cell	UL1642	
	Product	CE / RCM / TUV (IEC 62619) / UL1973	

Compatible Inverter Brands : SMA, SolaX, Sungrow, Schneider, Ingeteam, GoodWe, Redback, Victron Energy  
(As of 3Q. 2016, More brands to be added)

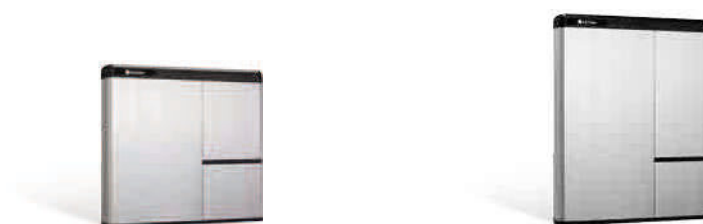

## 400V

Models	RESU7H	RESU10H	
Total Energy [kWh]	7.0	9.8	
Usable Energy [kWh]	6.6	9.3	
Capacity [Ah]	63	63	
Voltage Range [V]	350-450	350-450	385-550
Dimension [W x H x D, mm]	744 x 692 x 206	744 x 907 x 206	
Weight [kg]	76	97	99.8
Enclosure Protection Rating	IP55		
Communication	RS485	RS485	CAN 2.0 B
Certificates	Cell	UL 1642	
	Product	TUV (ICE 62619) / CE	TUV (IEC 62619) / UL1973 / CE

Compatible Inverter Brands : SMA, SolarEdge, Delta (As of 3Q. 2016, More brands to be added)